

WIRELESS **SLEEVES**

OWNERS MANUAL



**THE ATTACH ANYWHERE
WIRELESS MOUNTING SOLUTION**

WIRELESS SLEEVES

TABLE OF CONTENTS

Model Options

Large Wireless Sleeves	2
Slot Wireless Sleeves	3
CL Wireless Sleeves	4

Quick Start Guide

Large & CL Wireless Sleeves	5
Slot Wireless Sleeves	6

Product Breakdown

Clips	7
Slot Electronics Access	8
Slot Electronics	9

Tech Specs

Tech Specs	10
Models and Accessories	11

Company Info

Warranty	12
Company Contact	12

MODEL OPTIONS

LARGE WIRELESS SLEEVES



DESCRIPTION

Large Sleeves hold large wireless units firmly with an open bottom to allow easy access to all connectors.

Available with optional cutouts for Zaxcom Receivers with IFB functionality.

COMPATABILITY

Large Wireless Sleeves

Lectrosonics
822, 411, 211, T4, and T1

Zaxcom
QRX (Non IFB), and Micplexer

Large Wireless Sleeves IFB

Zaxcom QRX235

Zaxcom QRX100IFB

MODEL OPTIONS

SLOT WIRELESS SLEEVES



DESCRIPTION

Slot Wireless Sleeves hold slot receivers with threaded inserts following the SuperSlot™ standard. A bezel may be required for longer slot receivers. A DB25 connector passes audio to either 2 TA3 or 1 TA5 Stereo output connector and has a 2.5mm locking DC connector for power. It is not compatible with Unislot plates.

The SuperSlot™ electronics can be removed to accommodate other Slot Receiver bottom plates. Antenna Cable clips are placed at the top to hold RG174 antenna cables.

COMPATABILITY

Slot Wireless Sleeves

Audio Limited A10

Lectrosonics SR and DSR

Sennheiser EK 6042

Shure ADX5D

Sony DWR-S03D

Wisycom MCR42S and MCR54

Zaxcom SRX 220

MODEL OPTIONS

CL WIRELESS SLEEVES



DESCRIPTION

CL Sleeves hold Zaxcom Camera Link transmitters firmly, like the Large Sleeves, a pass-through bottom allows easy access to all connectors.

COMPATABILITY

CL Wireless Sleeves

Zaxcom TRXCL3/4/5

Zaxcom TRX900CL


Zaxcom IFB200/300

QUICK START

LARGE AND CL SLEEVES

1. Slide in Wireless

Press the unit down gently.

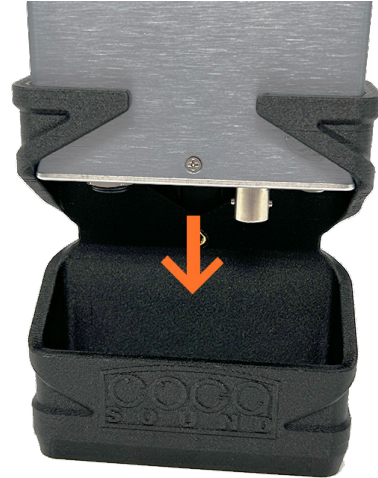

2. For IFB Models

Align the SMA connector with the slot on the side.



3. Check Bottom Connectors

Make sure the unit is seated snugly.



QUICK START

SLOT WIRELESS SLEEVES

1. Screw on Bezel (if needed)

Align the bezel and tighten screws.



2. Slide in Slot Receiver

Making sure the db25 connector is in the correct orientation, slide the receiver into the sleeve.



3. Tighten Receiver Screws

Attach the screws through the Receiver holes to the Bezel and Sleeve.



QUICK START

BPS CLIPS

1. Click in Clip

Slide the clip into the back of the Sleeve until it clicks.



2. Place Screw

Put the screw into the back of the clip and tighten.



3. Attach Sleeve

Attach the Sleeve to anything using the correct clip.



QUICK START

SLOT ELECTRONICS ACCESS


1. Remove Side Screws

Remove the screw on each side of the Sleeve.



2. Remove Bottom Screw

Flip the Sleeve over and remove the bottom screw.

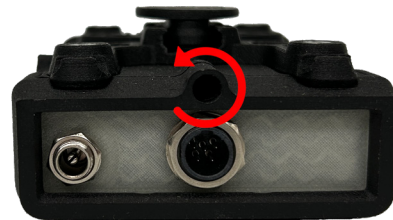



3. Remove Electronics

Gently slide the top and bottom apart to remove the electronics. Do not pull the bottom forward.



SLOT ELECTRONICS

SLOT SLEEVE

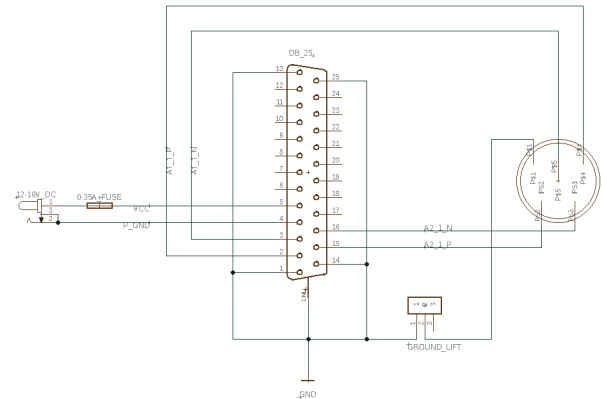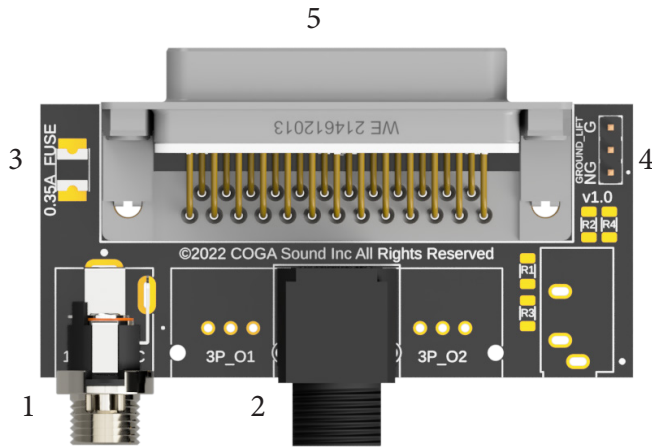

Wiring Diagram for TA5 model

1. DC Power Connector

Switchcraft 760k connector
 2.5mm X 5.5mm Short Locking DC Connector
 18V, 350mA Max Rating

2. Audio Connector

2 Channels Analog or 4 Channels AES3
 Optionally TA5 or 2 TA3 connectors

3. Fuse

0.35A Hold Current

4. Ground Lift


Disconnect Audio Ground when Jumper is set to NG

5. DB-25 connector

SuperSlot™ compliant audio pass through connector

TECH SPECS

SLOT SLEEVES

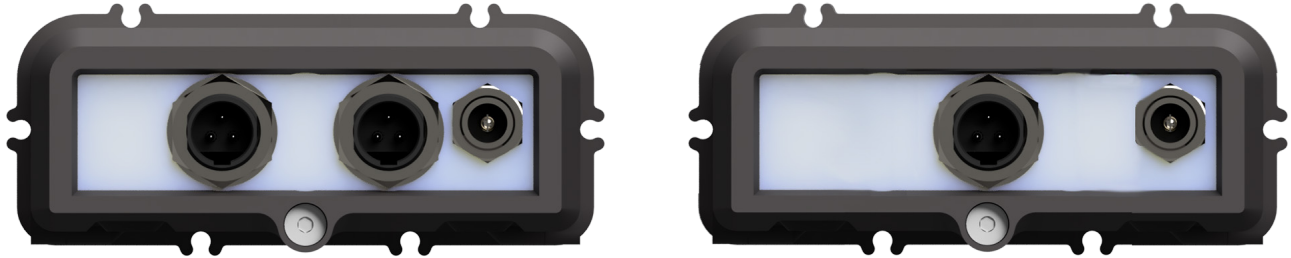

POWER

DC Power: 2.5mm X 5.5mm Short Locking DC Connector. 18V, 350mA Max Rating

Connector: Switchcraft 760k

AUDIO

DB25 Connector SuperSlot™ Audio Pass Through

2 Channel Analog Outputs

4 Channel AES Outputs

Output Wiring

TA3: Pin 1 - Ground, Pin 2 - (+), Pin 3 - (-)

TA5: Pin 1 - Ground, Pin 2 Channel 1 - (+), Pin 3 Channel 1 - (-),
Pin 4 Channel 2 - (+), Pin 5 Channel 2 - (-)

MODELS AND ACCESSORIES

IN THE BOX

- 1 Sleeve
- 1 Allen Key
- 1 Spare Screw, M3x8mm



INCLUDED PACKAGED SEPARATELY

- 1. BPS Basic Clip




WIRELESS SLEEVES

LIMITED 1-YEAR WARRANTY

This product is warranted for one (1) year against defects in materials or workmanship provided it was purchased from an authorized dealer and registered through our warranty page at cogasound.com. This warranty does not cover equipment which has been abused or damaged by careless handling or shipping. This warranty does not apply to used or demonstrator equipment. Should any defect develop, COGA Sound Inc. will, at our option, repair or replace any defective parts without charge for either parts or labor. If COGA Sound Inc. cannot correct the defect in your equipment, it will be replaced at no charge with a new or comparable item. COGA Sound Inc. will pay for the cost of returning your equipment to you. This warranty applies only to items returned to COGA Sound Inc. or an authorized dealer, shipping costs prepaid. This Limited Warranty is governed by the laws of the State of California. It states the entire liability of COGA Sound Inc. and the entire remedy of the purchaser for any breach of warranty as outlined above. Neither COGA Sound Inc. nor anyone involved in the production or delivery of the products shall be liable for any indirect, special, punitive, consequential, or incidental damages arising out of the use or inability to use the product even if COGA Sound, Inc. has been advised of the possibility of such damages. In no event shall the liability of COGA Sound Inc. exceed the purchase price of any defective product.

Register your COGA Sound Products at
www.cogasound.com/warranty

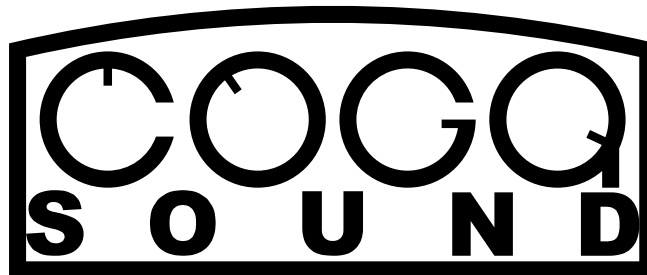

CUSTOMER SUPPORT

cogasound@gmail.com
cogasound.com

COGA SOUND INC.